




CHEN YING

OT Type Spray Gun (Air and Oil / Grease Volume Adjustable)



OT-1-0 (N.W.: 184g)

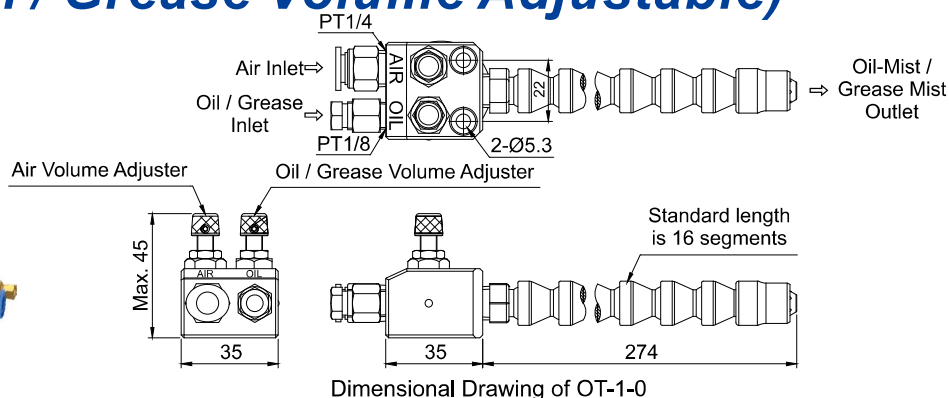

Dimensional Drawing of OT-1-0

◆ Features

- OT spray gun is suitable for working with resistance oil types, POM oil pneumatic types, and POM-A/POM-AP grease pneumatic types of lubricators.
- OT spray gun has one air inlet and one oil or grease inlet. The oil-mist or grease-mist mixture is superior without dripping.
- The volume of air and oil or grease is adjustable upon the need. Recommend using air pressure supply between 3.5 to 5kgf/cm².
- OT spray gun can add a magnetic base that can attach to any magnetic metal surface and relocate quickly.
- The standard length of the adjustable coolant hose is 16 segments, but the number of segments can be customized upon request.


◆ Order Code

OT — 1 — 0 — ※


Air Inlet Bore		Oil/Grease Inlet Bore	
1	Ø8xPT1/4	0	Ø4xPT1/8
		1	Ø6xPT1/8
Special Request			
C	Add a Magnetic Base		

※ If OT works with POM-A and POM-AP grease lubricators, the grease inlet bore should be Ø4xPT1/8.

OTS Spray Gun Set (Air and Oil Volume Adjustable)

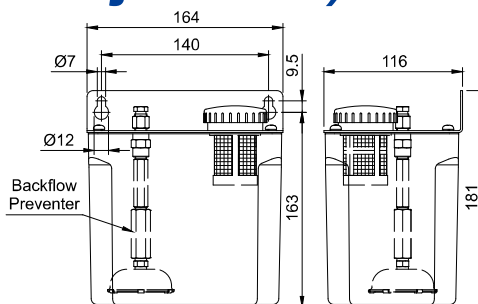OTS-1-0 (N.W.: 1013g)
(OT spray gun with an accessory kit)

Dimensional Drawing of 2-Liter Oil Tank




Dimensional Drawing of Backflow Preventer

◆ Features

- OTS spray gun set can work independently without a lubricator based on the siphon principle. It is suitable for cutting machines for high-speed micro lubrication and cooling effects.
- Standard OTS has an accessory kit that contains a 2-liter oil tank set, a backflow preventer, and a nylon pipe with a length of either Ø4x300cm or Ø6x150cm, depending on the oil inlet bore is Ø4 or Ø6.
- Recommend using OTS with oil, cutting fluid, or water that the viscosity range is 0-68 cSt@40°C. Forbid to use any volatile oil that contains ester or ethylene glycol.

◆ Installation Layout of OTS-1-0 Spray Gun Set

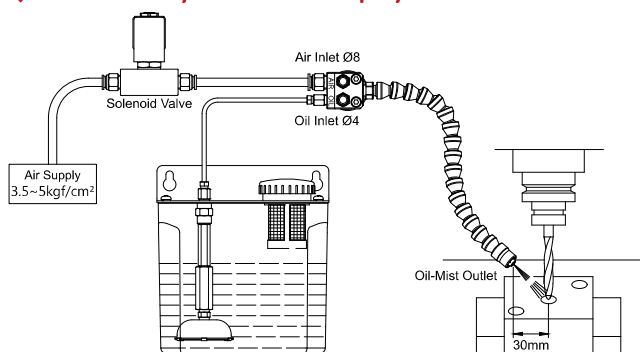

◆ Order Code

OTS — 1 — 0 — ※

Air Inlet Bore		Oil Inlet Bore		Special Request	
1	Ø8xPT1/4	0	Ø4xPT1/8	C	Add a Magnetic Base
		1	Ø6xPT1/8	D	Change Oil Tank from 2L to 4L
				E	Change 2L Oil Tank from Single Outlet to Dual Outlets (Add a Second OT Spray Gun)
				X	W/O 2L Accessory Kit (Only a backflow preventer and a nylon pipe will be supplied.)

OT Type Spray Gun / OTS Spray Gun Set (Air and Oil Volume Adjustable)