





CHEN YING

Compression Bushing

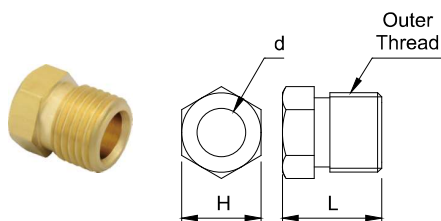

Model	Bore	d	L (mm)	H (mm)	Outer Thread	N.W. (g)
PA-4	Ø4	Ø4.1	12.0	8	M8xP1.0	3
PA-6	Ø6	Ø6.1	12.5	10	M10xP1.0	4
PA-8	Ø8	Ø8.1	14.0	14	M14xP1.5	9
PA-10	Ø10	Ø10.1	15.0	16	M16xP1.5	12
PA-12	Ø12	Ø12.1	16.0	19	M18xP1.5	16


One-Side-Tapered Compression Bushing

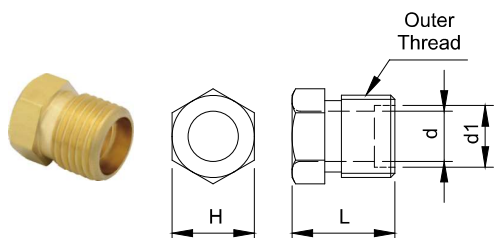

Model	Bore	d	d1	L (mm)	H (mm)	Outer Thread	N.W. (g)
PA104	Ø4	Ø4.1	Ø5.5	12.0	8	M8xP1.0	3.0
PA106	Ø6	Ø6.1	Ø7.5	12.5	10	M10xP1.0	4.0
PA108	Ø8	Ø8.1	Ø9.2	14.0	14	M14xP1.5	9.7


※ One-Side-Tapered Compression Bushing only works with One-Side-Tapered Compression Sleeve.

Compression Sleeve

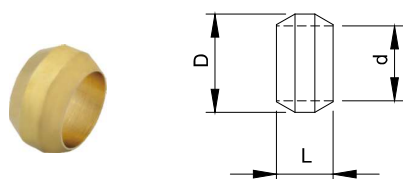


Model	Bore	d	D	L (mm)	N.W. (g)
PB-4	Ø4	Ø4.1	Ø6.0	4.6	0.3
PB-6	Ø6	Ø6.1	Ø8.0	4.6	0.6
PB-8	Ø8	Ø8.1	Ø11.0	7.0	2.0
PB-10	Ø10	Ø10.1	Ø13.5	8.0	3.0
PB-12	Ø12	Ø12.1	Ø16.0	9.0	4.0

One-Side-Tapered Compression Sleeve

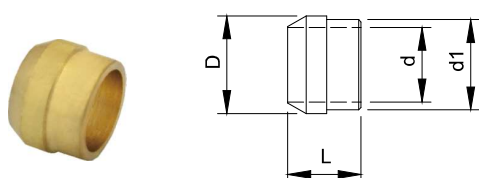

Model	Bore	d	d1	D	L (mm)	N.W. (g)
PB104	Ø4	Ø4.1	Ø5.4	Ø6	5.5	0.4
PB106	Ø6	Ø6.1	Ø7.4	Ø8	6.0	0.7
PB108	Ø8	Ø8.1	Ø9.1	Ø10	7.0	1.1

Closure Plug

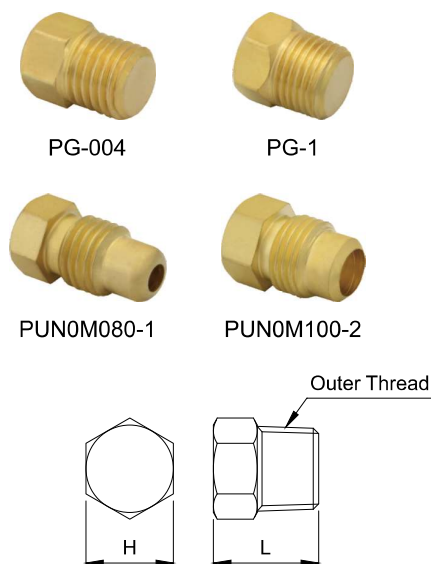

Model	Outer Thread	L (mm)	H (mm)	N.W. (g)
PG-004	M8xP1.0	12	8	4
PG-1	PT1/8	12	10	6
PUN0M080-1	M8xP1.0 (Central Bore Ø3, Long Type)	16	8	6
PUN0M100-2	M10xP1.0 (Central Bore Ø6)	16	10	8