


Straight Adapter




CHEN YING

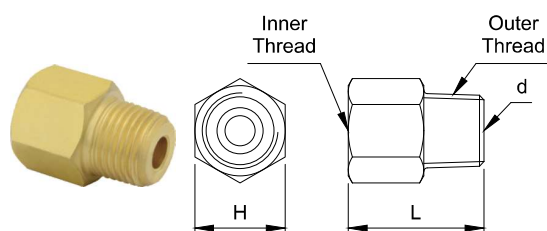


Standard Models								
Model	Bore	Inner Thread	Outer Thread	d	L (mm)	H (mm)	N.W. (g)	Se
PD-401	Ø4	M8xP1.0	PT1/8	Ø3	18	10	8	*
PD-402			PT1/4	Ø3	18	14	17	*
PD-601	Ø6	M10xP1.0	PT1/8	Ø4	18	12	8	*
PD-602			PT1/4	Ø5	18	14	14	*
PD-603			PT3/8	Ø5	18	17	24	*
PD-801	Ø8	M14xP1.5	PT1/8	Ø5	26	17	22	*
PD-802			PT1/4	Ø6	26	17	26	*
PD-803			PT3/8	Ø7	26	17	30	*
PD-1002	Ø10	M16xP1.5	PT1/4	Ø7	30	19	33	*
PD-1003			PT3/8	Ø9	30	19	35	*
PD-1202	Ø12	M18xP1.5	PT1/4	Ø7	32	21	42	*
PD-1203			PT3/8	Ø9	34	21	46	*
Non-Standard Models								
Model	Bore	Inner Thread	Outer Thread	d	L (mm)	H (mm)	N.W. (g)	Se
PD-406	Ø4	M8xP1.0	M6xP0.75	Ø2	20	10	6	*
PD-4061			M6xP1.0	Ø2	20	10	6	*
PD-408			M8xP1.0	Ø3	18	10	6	*
PD-410			M10xP1.0 (TAP)	Ø3	18	12	6	*
PD-606	Ø6	M10xP1.0	M6xP0.75	Ø2	18	12	8	*
PD-6061			M6xP1.0	Ø2	18	12	8	*
PD-608			M8xP1.0	Ø3	21	12	8	*
PD-610			M10xP1.0 (TAP)	Ø4	18	12	8	*
PD-101	-	PT1/8	PT1/8	-	18	12	9	--
PD-102	-		PT1/4	-	18	14	16	--
PD-202	-	PT1/4	PT1/4	-	18	16	14	--
PD-203	-		PT3/8	-	26	17	34	--

One-Way Flow Straight Adapter

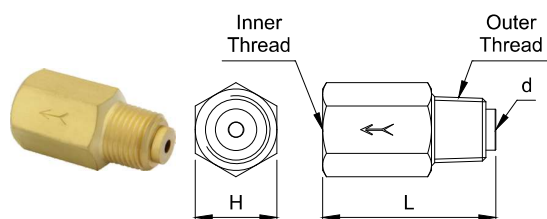

Model	Bore	Inner Thread	Outer Thread	d	L (mm)	H (mm)	N.W. (g)	Set
PD-4011	Ø4	M8xP1.0	PT1/8	Ø2.2	24.5	10	11	*
PD-6011	Ø6	M10xP1.0			25.5	12	14	*

Reverse Flow Straight Adapter

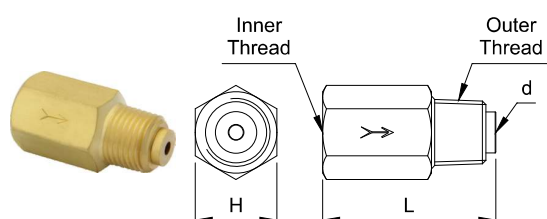

Model	Bore	Inner Thread	Outer Thread	d	L (mm)	H (mm)	N.W. (g)	Set
PD-4012	Ø4	M8xP1.0	PT1/8	Ø2.2	24.5	10	11	*
PD-6012	Ø6	M10xP1.0			25.5	12	14	*

※ The model with an "*" mark can be assembled with compression bushing and compression sleeve as a set. If you need the model as a set, please specify when you place an order.

Straight Adapter / One-Way Flow Straight Adapter / Reverse Flow Straight Adapter