



Steel Plate Frame Horizontal Motor

PMO-0

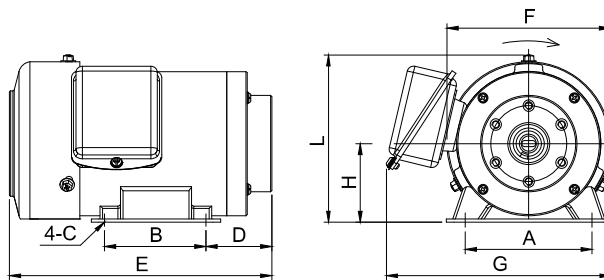


HP	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	L (mm)	N.W. (kg)
1/8	70	60	Ø7	51.0	181	108	152	56	115	5.0
1/4	100	80	Ø8	51.5	207	129	177	62	132	6.5

Cast Iron Frame Horizontal Motor

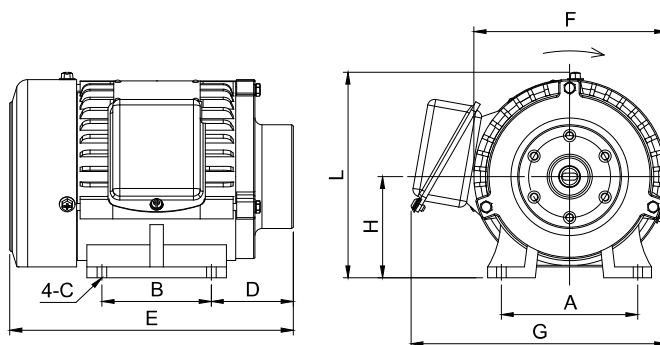

HP	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	L (mm)	N.W. (kg)
1/4	100	80	Ø7	60.0	207.5	142	187.0	74	150.0	8.8
1/2	125	100	Ø10	68.0	247.5	175	225.5	80	167.5	13.0
1	125	100	Ø10	75.5	262.5	175	225.5	80	168.0	15.0
2	140	125	Ø12	72.5	284.0	196	251.0	90	188.0	21.0

Cast Iron Frame Vertical Motor

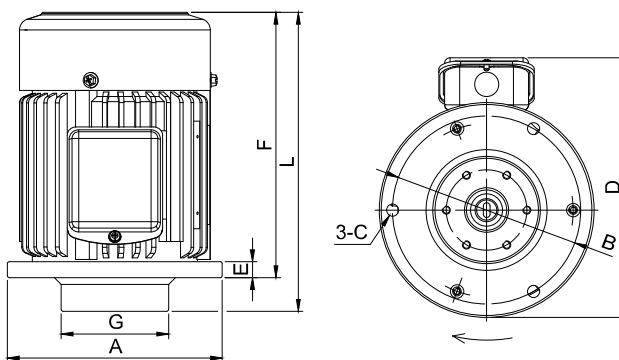

HP	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	L (mm)	N.W. (kg)
1/4	Ø160	Ø140	Ø9	193	12	190	Ø80	215	10.0

Order Code

PMO-0 — 02 — D — 1 — 2

Motor	HP	Voltage				Type	Frame
	01 1/8 HP	A	1Ø110V	G	3Ø230/460V	1	Steel Plate (For 1/8HP, 1/4HP)
	02 1/4 HP	C	1Ø220V	H	3Ø240/480V		
	04 1/2 HP	D	3Ø220/380V	M	3Ø220V	3	Cast Iron (For 1/4HP, 1/2HP, 1HP, 2HP)
	08 1 HP	E	3Ø220/440V	N	3Ø380V		
	16 2 HP	F	3Ø208/415V	X	Special Voltage		

※ A standard dual-voltage motor is connected for low voltage. Please specify if you need it to be connected to high voltage when placing an order.