




CHEN YING

Flexible Hose

Model	Bore	Inner Diameter	Outer Diameter	A (mm)	Min. Length	Max. Operating Pressure	Suitable Lubricant
PPST00	Ø4	Ø3.2-3.5	Ø7.6-7.9	21	100mm	40 kgf/cm ²	Oil
	Ø6	Ø4.2-4.5	Ø9.2-9.5				



Order Code

PPST00 — 4 — 0100 — ※

Bore	Length	Special Request
4 Ø4	0100 100mm	S Add Compression Bushings and Sleeves to Both Ends
6 Ø6	to 9000 9000mm	

Flexible Hose Spring (For Guarding PPST00 Flexible Hose)




Model	Suitable PPST00 Bore	Spring Inner Dia.	Spring Outer Dia.	Standard Length	N.W. (g)
PPST20	Ø4	Ø8.7	Ø10.3	2000mm	158.6
	Ø6	Ø10.1	Ø11.9		208.4

Order Code


PPST20 — 4 — 2000

PPST00 Bore	Length
4 Ø4	2000 2000mm
6 Ø6	

High-Pressure Flexible Hose

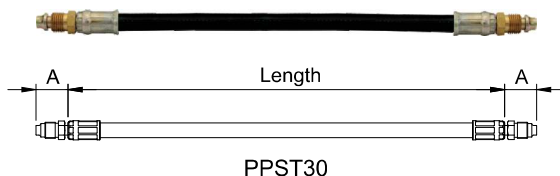

PPST30

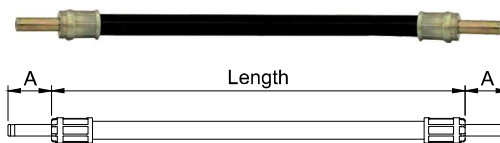

PPST50


Model	Inner Diameter	Bore	A (mm)	Min. Length	Max. Operating Pressure	Suitable Lubricant
PPST30	1/8"	Ø4	20.5	150mm	300 kgf/cm ²	Grease
		Ø6	21.0			
PPST50	1/4"	Ø6	30.3	30.3		
		Ø8	30.3			

Order Code

PPST — 30 — 4 — 0150

Inner Diameter	Bore	Length
30 1/8"	4 Ø4 (PPST30 Only)	0150 150mm
50 1/4"	6 Ø6	to 9000 9000mm
	8 Ø8 (PPST50 Only)	

Flexible Metallic Hose

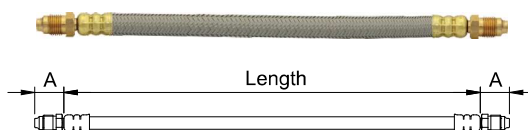

Model	Bore	A (mm)	Min. Length	Max. Operating Pressure	Suitable Lubricant
PPST40	Ø4 or Ø6	19	100mm	70 kgf/cm ²	Oil or Grease

Order Code

PPST40 — 4 — 0100

Bore	Length
4 Ø4	0100 100mm
6 Ø6	to 9000 9000mm